

# TYPICAL INSTALLATION INSTRUCTIONS

## COPPER WALL BRACKET-GAS

Applies to all Copper Wall Mounted lanterns  
Sizes : Large & Grande

Light Supplied w/  
4-#8-32 Acorn Nuts  
4-4"x 1/4" Hanger Bolt


Natural Gas Requires 7" W.C. BTU 2730  
Propane Gas Requires 11" W.C. BTU 2080

Screw the Hanger Bolt (anchors may be needed for some brick/stone applications) leaving enough to penetrate through the holes in the Bracket. Connect the gas line from the lantern to the main. Make sure to test the fittings for gas leaks before securing the lantern to the wall. Position light over the Hanger Bolt and attach the Acorn Nuts, tightening to securely mount light.

Clearance:

-12" from vent  
to ceiling  
-6" from sides

Apply Caulking to  
both sides and top of  
Wall Box. DO NOT apply  
on bottom

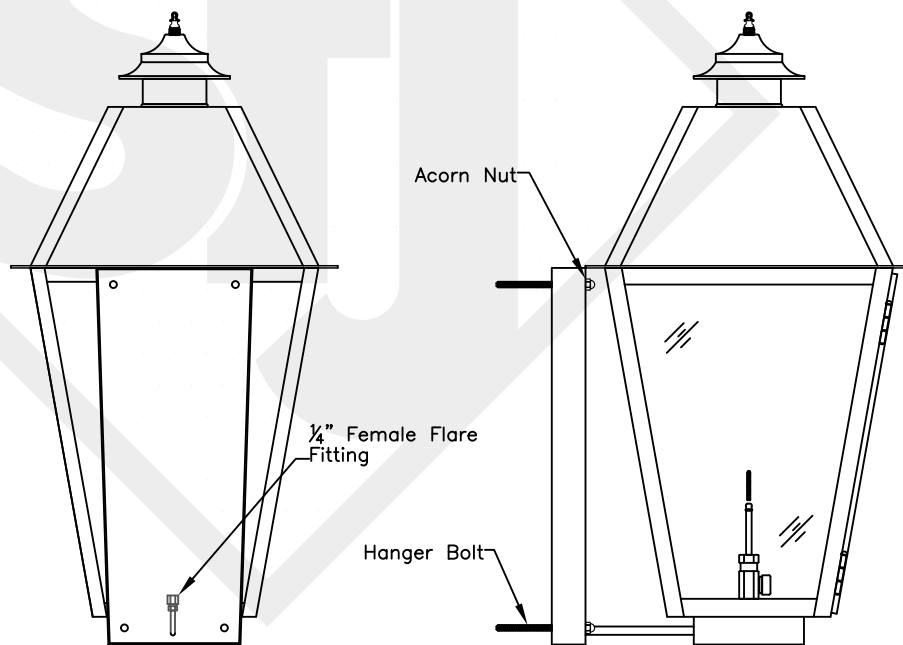


Back View

Side View

CAUTION: Risk of fire or electric shock

This product is to be installed by a qualified Plumber ONLY. Installation must conform with all local codes or, in the absence of local codes, to UL 1598, Gas Code ANSI Z21.42 - 2004, Gas Illuminating Appliance

Typical Install Copper Wall Bracket	
 St. James LIGHTING	
SCALE: N.T.S.	DRAFT: B. Vial
FILE: INSTALL	APP'D: J. Ragan
JOB: X	DATE: 10/11/17