

TRINITY INSTALLATION INSTRUCTIONS

STEEL WALL BRACKET


Applies to all Steel Wall Mounted Trinity

Sizes Mini–Large Supplied w/:
 4–#8–32 Acorn Nuts
 4–4" x ¼" Hanger Bolt

Size Grande Supplied w/:
 4–#8–32 Acorn Nuts
 4–5" x ¼" Hanger Bolt

Natural Gas Requires 7" W.C. BTU 2730
 Propane Gas Requires 11" W.C. BTU 2080

Screw the Hanger Bolt into the wall leaving enough to penetrate through the holes in the Wall Bracket. Connect Black(+) & White(-) wires to power source. Position light over the Hanger Bolt and attach the Acorn Nuts, tightening to securely mount light. Apply Caulking to both sides and top of Wall Box. DO NOT apply on bottom.

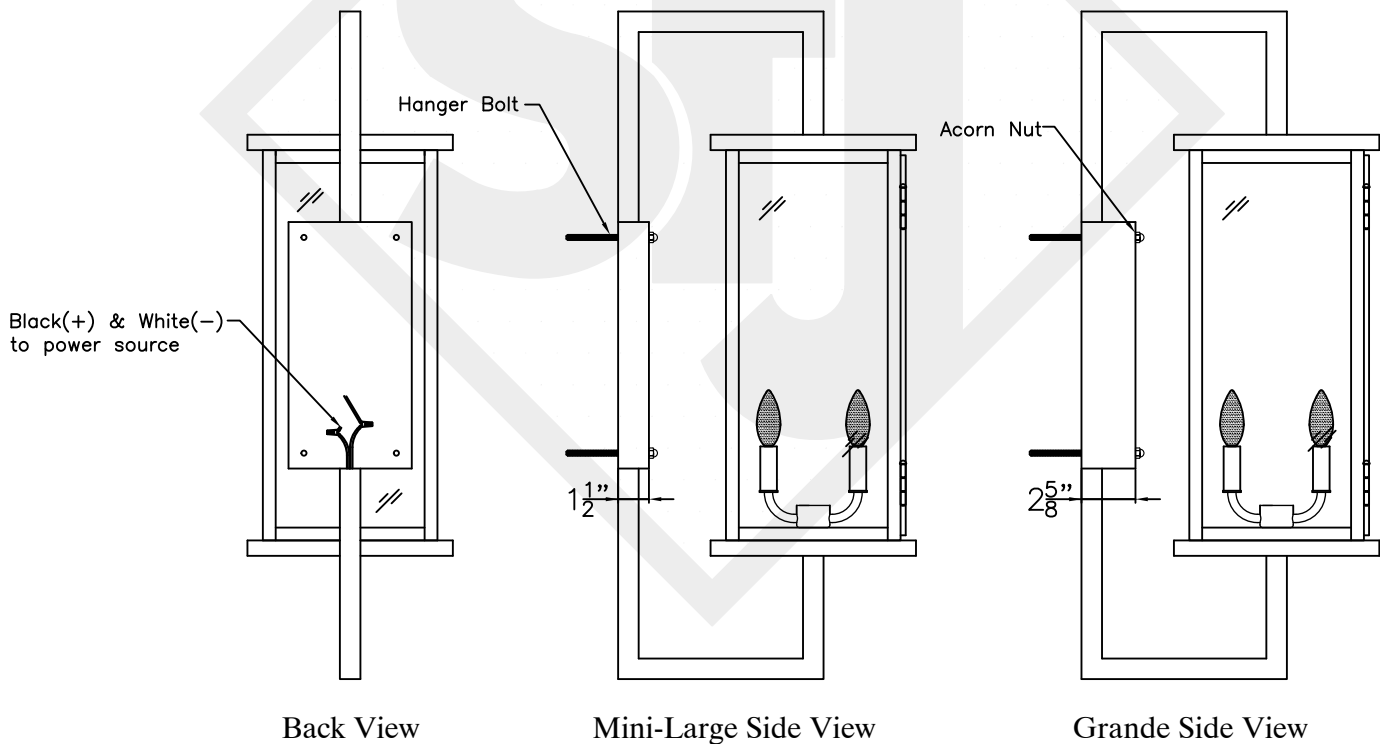

CAUTION: Risk of fire or electric shock

This product is to be installed by a qualified Electrician ONLY. Installation must conform with all local codes or, in the absence of local codes, to the standard for Incandescent Lighting Fixtures ANSI/UL 1598

Trinity Install Steel Wall Bracket	
St. James LIGHTING	
SCALE: N.T.S.	DRAFT: B. Vial
FILE: INSTALL	APP'D: J. Ragan
JOB: X	DATE: 06/28/18