

TYPICAL INSTALLATION INSTRUCTIONS

STEEL WALL BRACKET – GAS

Applies to all Steel Wall mounted lanterns
Sizes : Small, Medium Large & Grande


Light Supplied w/
4–Acorn Nuts
4–5" x ¼" Hanger Bolt

Natural Gas Requires 7" W.C. BTU 2730
Propane Gas Requires 11" W.C. BTU 2080

Screw Hanger Bolts into the wall (Anchors may be needed for Brick/Stone application) leaving enough to penetrate through the holes in the Wall Bracket. Connect the gas line from the lantern to the main. Make sure to test the fittings for gas leaks before securing the lantern to the wall. Position light over the Hanger Bolts and attach Acorn Nuts, tightening to securely mount light.

Clearance:

–12" from vent
to ceiling
–6" from sides

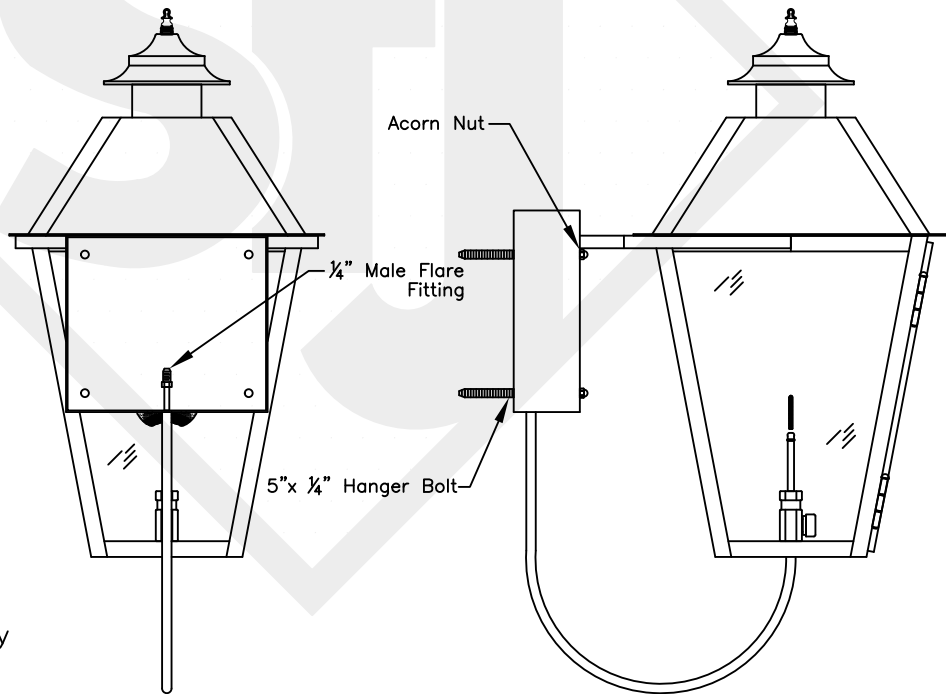


Apply Caulking to
both sides and top of
Wall Box. DO NOT apply
on bottom

Back View

Side View

CAUTION: Risk of fire or electric shock

This product is to be installed by a qualified Plumber ONLY. Installation must conform with all local codes or, in the absence of local codes, to UL 1598, Gas Code ANSI Z21.42 – 2004, Gas Illuminating Appliance

Typical Install Steel Wall Bracket	
 St. James LIGHTING	
SCALE: N.T.S.	DRAFT: B. Vial
FILE: INSTALL	APP'D: J. Ragan
JOB: X	DATE: 10/11/17